



Product Features

- Suspended mounted
- Direct lighting
- Aluminum body in color-coated or anodised
- Diffuser in opal polycarbonate
- Available in single modules or in continuous line



RAL 7016

RAL 9003

RAL 9011

Blade SU

Product Description


BLADE SU modular system consists of suspended application solutions. BLADE SU is the ideal solution for direct lighting. BLADE SU modular system provides to the user a pleasant ambient light both in individual modules and in continuous-line systems with diffused light.

Advantages

- Individual modules and continuous-line systems
- Pleasant ambient light
- Ideal direct lighting

Application

For diverse uses like hotels, residential, offices among others.

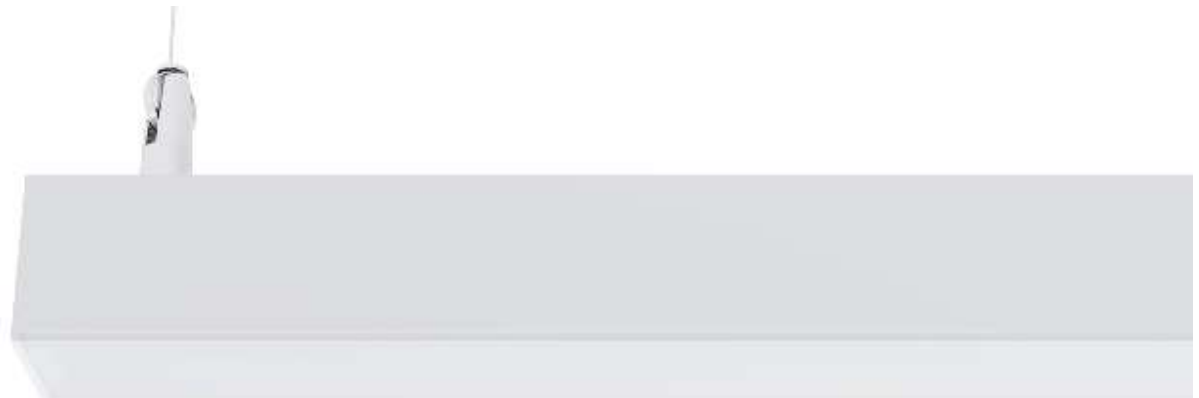



PHOTOMETRIC SPECIFICATIONS

version		color temp	luminous flux	cri	size	input power
BLADE SU 500 LB	LED	3000k 4000k	1316Lm 1385Lm	>80	22.6x1.4x1.5"	13 W
BLADE SU 500 MB	LED	3000k 4000k	1558Lm 1640Lm	>80	22.6x1.4x1.5"	16 W
BLADE SU 500 HB	LED	3000k 4000k	1791Lm 1885Lm	>80	22.6x1.4x1.5"	18 W
BLADE SU 800 LB	LED	3000k 4000k	1973Lm 2077Lm	>80	34.1x1.4x1.5"	19 W
BLADE SU 800 MB	LED	3000k 4000k	2337Lm 2460Lm	>80	34.1x1.4x1.5"	23 W
BLADE SU 800 HB	LED	3000k 4000k	2687Lm 2828Lm	>80	34.1x1.4x1.5"	27 W
BLADE SU 1100 LB	LED	3000k 4000k	2632Lm 2770Lm	>80	44.6x1.4x1.5"	25 W
BLADE SU 1100 MB	LED	3000k 4000k	2960Lm 3116Lm	>80	44.6x1.4x1.5"	30 W
BLADE SU 1100 HB	LED	3000k 4000k	3584Lm 3772Lm	>80	44.6x1.4x1.5"	35 W
BLADE SU 1400 LB	LED	3000k 4000k	3289Lm 3462Lm	>80	55.7x1.4x1.5"	30 W
BLADE SU 1400 MB	LED	3000k 4000k	3895Lm 4100Lm	>80	55.7x1.4x1.5"	36 W
BLADE SU 1400 HB	LED	3000k 4000k	4479Lm 4714Lm	>80	55.7x1.4x1.5"	43 W

Ordering Chart

Product Name	Length	Color Temp	Driver Output	Options	Finish
Blade SU	500 22.6"	30k 3000 K	LB Low	EM15 Emergency Battery Backup (approx. 1050 lumens) NA No Options	RAL 7016
	800 34.1"	35k 3500 K	MB Medium		RAL 9003
	1100 44.6"	40k 4000 K	HB High		RAL 9011
	1400 55.7"				

Custom configurations available. Contact NAL for details