

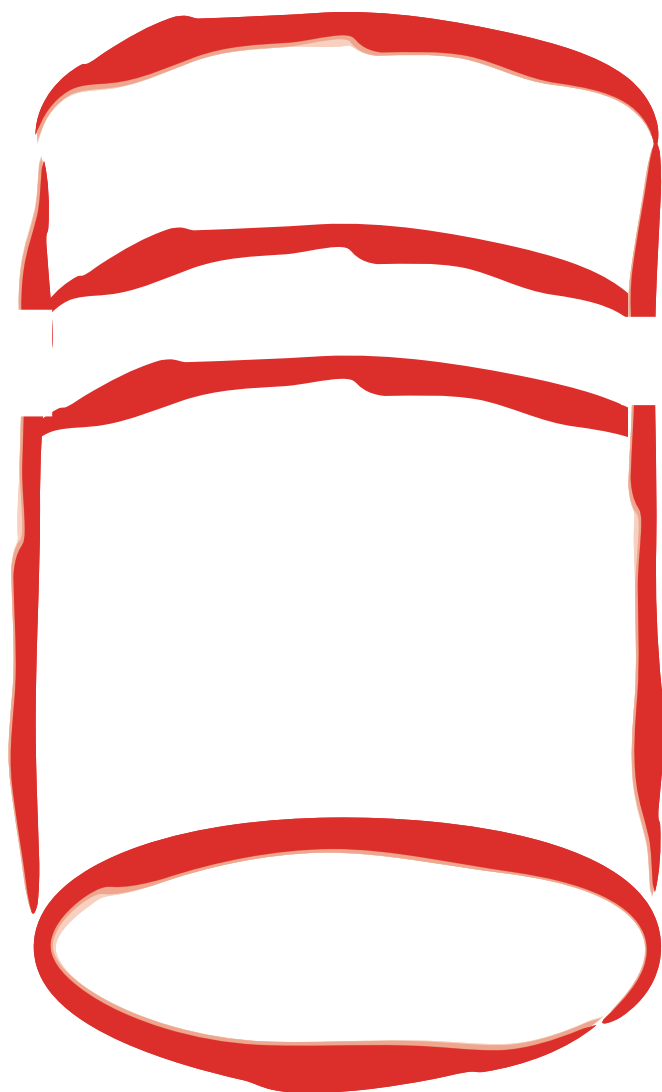


LA TORRE



...




Tubo 150 LED

PLAFONIERE
CEILING S



LA TORRE

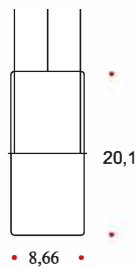

POWER SUPPLY
120/277V-50/60Hz

Corpi in alluminio. Sistemi ottici completi di moduli LED COB, riflettori in alluminio brillantato con puro alluminio 99,9% per il massimo recupero e controllo dell'emissione luminosa. Alimentatori integrati. Disponibile con diverse altezze e con possibilità di vetro di protezione posto davanti al riflettore ed inserito nell'apparecchio (su richiesta).

Aluminum bodies. Optical systems complete with COB LED modules, polished aluminum reflectors with 99.9% pure aluminum for maximum recovery and control of light emission. Integrated power supplies. Available in different heights and with the possibility of a protective glass placed in front of the reflector and inserted in the luminaire (on request).

CODE	LED		W	LUMEN NOM	
				3000°K	4000°K
404025	COB45°	1X40W + 1X25W	65	5420 + 3770	5600 + 3900
405025	COB45°	1X50W + 1X25W	75	7080 + 3770	7300 + 3900

■ COLOR CODE


- 10 - frosted alu
- 21 - green apple
- 22 - red scarlet
- 23 - green teal
- 32 - frosted white
- 33 - frosted black
- 34 - tangerine
- 75 - corten

● LED COLOR CODE

- 3000°K - 85
- 3500°K - 85
- 4000°K - 85

LA TORRE

Ordering Code:

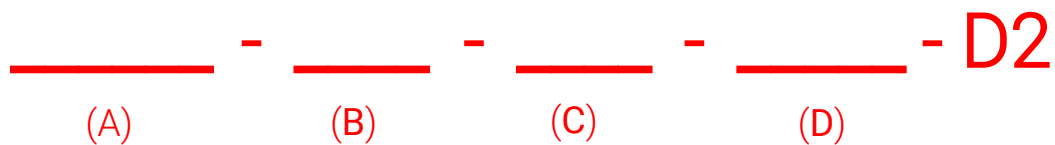

Part Family (A)	Finish Color (C)	LED CCT (E) (80+ CRI)	
404025 - La Torre DE Pendant	Choose from color chart on page1	3000K	4000K
405025 - La Torre DE Pendant		3500K	5000K
Lumen Package (B)		Dimming	
40 - 40W (direct) + 25W (indirect)		D2 - 0-10V dim (120 to 277V)	
50 - 50W (direct) + 25W (indirect)		Consult factory for additional options	
<i>See table above for source lumens. Delivered lumens depends on interior color.</i>			